



GRAFFITI SHIELD^{INC.}

HOLISTIC APPROACH TO GRAFFITI CONTROL

3M Multi-Layer Installation Procedure



3M Multi Layer Installation:

Tools Needed:

Graffiti Shield Multi-Layer Tool Kit

GST-0002 Heavy Duty Squeegee

GST-0026 Blue Squeegee Card

GST-0027 Film Pick

GST-0001 Unger ErgoTec Handle

GST-0004 12" Squeegee Channel w/Black Blade

GST-0022 Spray Bottles (32 oz. chemical resistant)

GST-0019 Film On Concentrate (Installation Solution)

GST-0030 Tool Caddy



GST-0025 3M Glide Strips (10) Pack

Also recommend micro fiber towels or lint free paper towels.

3M Multi Layer Installation:

If existing anti-graffiti or multi-layer film is installed. Do the following to ensure removal is done correctly.

- Take your pick tool, and go to a corner of the material.
- Gently pick up or lift a corner of the film.
- Slowly pull the film off the window to ensure as much or all the adhesive pulls off with the film.

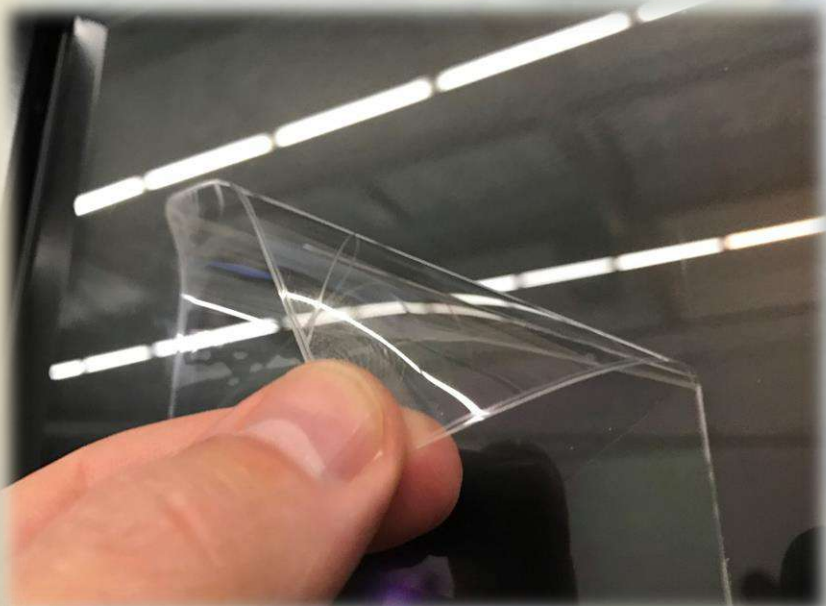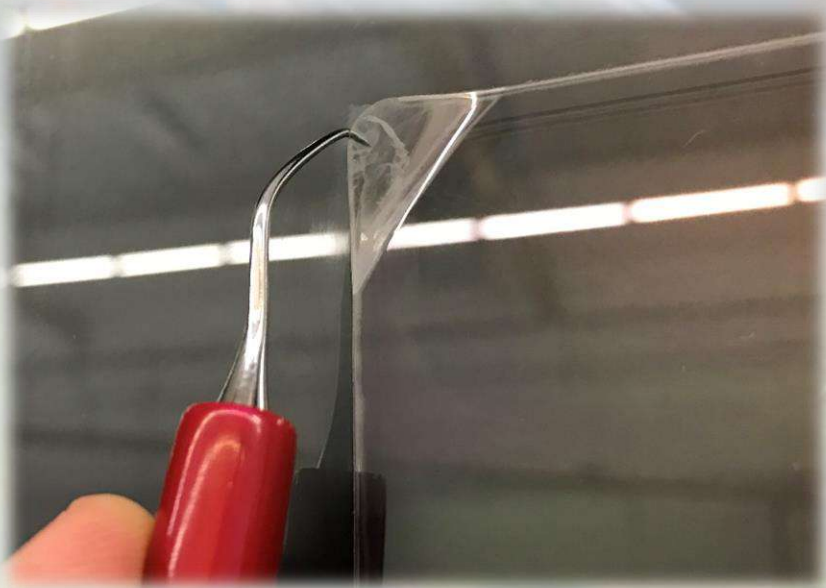



3M Multi Layer Installation:


Installation of the 3M Multi Layer is quick and efficient, but it does have some steps we recommend for a flawless installation.

- Fill a standard spray bottle with clean filtered water. Or use a 5 gallon sprayer filled with 4 gallons of clean filtered water.
- Add Film On, 2 capfuls for standard spray bottle or 4 oz. per 4 gallons, and shake well.
- If adhesive is left from previous install, then spray surface with soap and water. Then use 6" Triumph Scraper with SS Blade and slowly scrape adhesive off.
- If no adhesive is on the window then spray the surface with soap and water and scrub the surface with a white scrubby. Then use a 6" Triumph Scraper with SS blades and scrape the glass clean of all debris.
- Wipe the surface by using micro fiber cloth or paper towel. Make sure to wipe the top and sides well.



3M Multi-Layer Installation:

- Now spray the glass panel again completely and use your large cleaning squeegee to remove the solution from side to side, and from top to bottom.
- Spray the panel again and leave it wet.
- Next, take your 3M Multi-Layer and remove the release liner. Spray the adhesive with the soap and water solution. Make sure to spray all areas to ensure that all adhesive is wet.

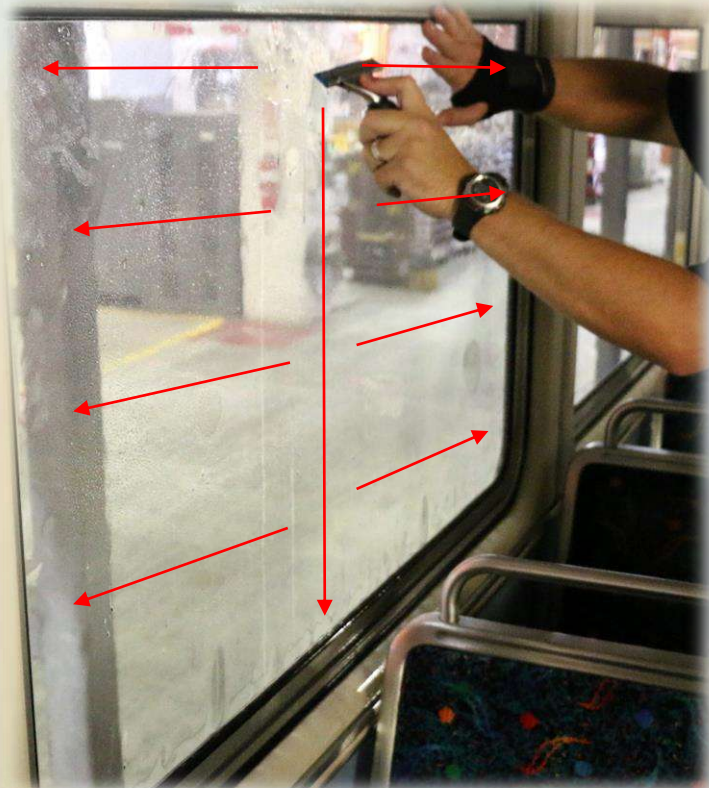

3M Multi-Layer Installation:

- Carefully place the 3M Multi-Layer on the panel. Move accordingly into place as needed.
- Then spray the panel with the soap and water solution.
- Squeegee the 3M Multi-Layer with the HD Squeegee pictured below from center out per the arrowed diagram 2 times.
- Dry the edges with gold card wrapped in paper towel or micro fiber towel.
- Then wipe entire panel with micro fiber towel.
- Panel is complete.

